



NOBILE



| | |
|--|----------|
| Energy Efficiency Class | A |
| According to the law Ecodesign 2022 | ✓ |
| According to the Austrian law 15a B-VG | ✓ |
| According to the German law BimSchV2 | ✓ |
| According to EN13240 | ✓ |
| CE marking | ✓ |

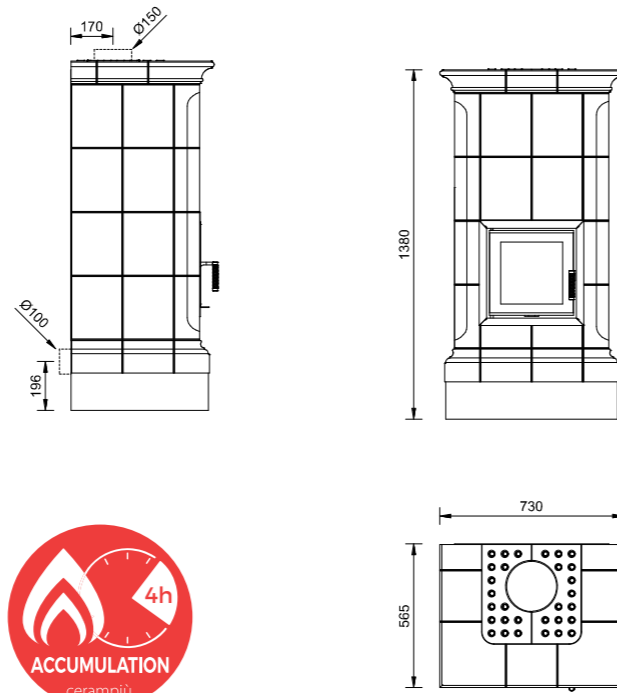

| | |
|--|------------------------|
| Rated heat output | 7,5 Kw |
| Efficiency | 81,5% |
| CO (13% O ₂) | 822 mg/Nm ³ |
| Fuel | Wood logs |
| Fuel consumption | 2,2 Kg/h |
| Smoke temperature | 243° C |
| Smoke volume | 6,5 g/s |
| Smoke exhaust | Ø150 |
| Required draft | 12 Pa |
| Air intake connector | Ø100 |
| Firechamber dimension | 30,5x27x42 (h) cm |
| Weight | 310 Kg |
| Heat accumulation | 4 h |
| Hybrid | 2 Kw |
| Minimum distance from non-flammable wall | 50 mm |
| Connector for convective duct | Ø100 |

