




# NOBILE 5 LEVELS



Energy Efficiency Class	<b>A</b>
According to the law Ecodesign 2022	✓
According to the Austrian law 15a B-VG	✓
According to the German law BimSchV2	✓
According to EN13240	✓
CE marking	✓

Rated heat output	7,5 Kw
Efficiency	81,5%
CO (13% O <sub>2</sub> )	822 mg/Nm <sup>3</sup>
Fuel	Wood logs
Fuel consumption	2,2 Kg/h
Smoke temperature	243° C
Smoke volume	6,5 g/s
Smoke exhaust	Ø150
Required draft	12 Pa
Air intake connector	Ø100
Firechamber dimension	30,5x27x42 (h) cm
Weight	330 Kg
Heat accumulation	5 h
Hybrid	2 Kw
Minimum distance from non-flammable wall	50 mm
Connector for convective duct	Ø100

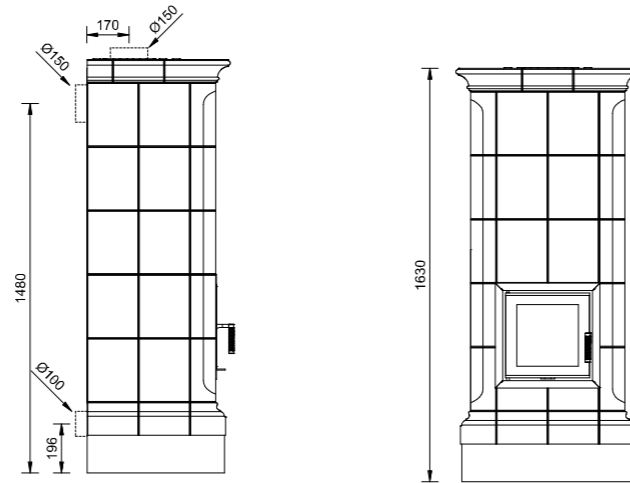